


TS MG 12(TSG2)

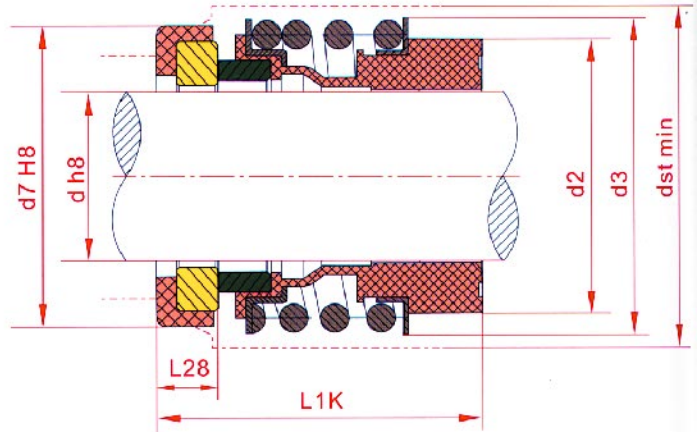

技术参数:
 压力: $\leq 1.2\text{MPa}$
 线速度: $\leq 10\text{m/s}$
 温度: $-20^{\circ}\text{C} \sim +120^{\circ}\text{C}$

Operating Limits:
 Pressure: $\leq 1.2\text{MPa}$
 Speed: $\leq 10\text{m/s}$

TS MG12系列标准配G60静环(DIN24960)
 另外还可提供G4,G6,G9静环

TS MG12 seal equip with G60 seat(DIN24960)
 Other seats can also be provided,such
 as G4,G6, G9 seat.

- | | |
|----------------------|--------------------------------------|
| ● 静环(陶瓷/碳化硅/碳化钨) | Stationary Ring (Ceramic/SiC/TC) |
| ● 动环(车制石墨/碳化硅/碳化钨) | Rotary Ring (Carbon/SiC/TC) |
| ● 辅助密封(丁腈胶/三元乙丙胶/氟胶) | Secondary Seal (NBR/EPDM/VITON) |
| ● 弹簧及其它金属件(不锈钢) | Spring & Other Parts (SUS304/SUS316) |

Seal size d(mm)	d	d2	dst	d3	d7	L1K	L28
10	10.0	20.5	24	22.5	21.0	32.5	6.6
12	12.0	22.5	26	25.0	23.0	32.5	6.6
14	14.0	26.5	30	28.5	25.0	35.0	6.6
16	16.0	26.5	30	28.5	27.0	35.0	6.6
18	18.0	29.0	33	32.0	33.0	37.5	7.5
20	20.0	33.0	38	37.0	35.0	37.5	7.5
22	22.0	33.0	38	37.0	37.0	37.5	7.5
24	24.0	38.0	44	42.5	39.0	40.0	7.5
25	25.0	38.0	44	42.5	40.0	40.0	7.5
28	28.0	44.0	50	49.0	43.0	42.5	7.5
30	30.0	44.0	50	49.0	45.0	42.5	7.5
32	32.0	46.0	55	53.5	48.0	42.5	7.5
33	33.0	46.0	55	53.5	48.0	42.5	7.5
35	35.0	50.0	59	57.0	50.0	42.5	7.5
38	38.0	53.0	61	59.0	56.0	45.0	9.0
40	40.0	55.0	64	62.0	58.0	45.0	9.0
43	43.0	58.0	67	65.5	61.0	45.0	9.0
45	45.0	60.0	70	68.0	63.0	45.0	9.0
48	48.0	63.0	74	70.5	66.0	45.0	9.0
50	50.0	65.0	77	74.0	70.0	47.5	9.5
53	53.0	70.0	81	78.5	73.0	47.5	11.0
55	55.0	72.0	83	81.0	75.0	47.5	11.0
58	58.0	75.0	88	85.5	78.0	52.5	11.0
60	60.0	79.0	91	88.5	80.0	52.5	11.0
65	65.0	84.0	96	93.5	85.0	52.5	11.0
68	68.0	88.0	100	96.5	90.0	52.5	11.3
70	70.0	90.0	103	99.5	92.0	60.0	11.3
75	75.0	95.0	110	107.0	97.0	60.0	11.3
80	80.0	100.0	116	112.0	105.0	60.0	12.0
85	85.0	107.0	124	120.0	110.0	60.0	14.0
90	90.0	114.0	131	127.0	115.0	65.0	14.0
95	95.0	119.0	136	132.0	120.0	65.0	14.0
100	100.0	124.0	140	137.0	125.0	65.0	14.0