


TS BIA

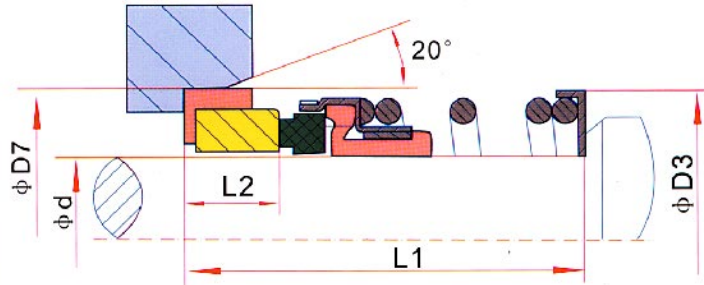

技术参数:

压力: $\leq 1.0\text{MPa}$
 线速度: $\leq 10\text{米/秒}$
 温度: $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$

Operating Limits:

Pressure: $\leq 1.0\text{MPa}$
 Speed: $\leq 10\text{ m/s}$
 Temperature: $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$

- 静环 (陶瓷/碳化硅/碳化钨) Stationary Ring (Ceramic/SiC/TC)
- 动环 (热压石墨/车制石墨/碳化硅/碳化钨) Rotary Ring (Plastic Carbon/Carbon/ SiC/TC)
- 辅助密封 (丁腈胶/三元乙丙胶/氟胶) Secondary Seal (NBR/ EPDM/VITON)
- 弹簧及冲件 (不锈钢) Spring & Other Parts (S.S/SUS304/SUS316)

Model	d	D3	D7	L1	L2
TSBIA-14	14	27	30	23.7	5
TSBIA-16	16	28.5	32	26	5
TSBIA-18	18	30.5	35	30	7.5
TSBIA-20	20	31.5	35	29	8
TSBIA-25	25	39	40	33.5	8
TSBIA-28	28	42	43	33.5	8
TSBIA-30	30	44	45	34.5	9
TSBIA-32	32	46	48	42.5	9
TSBIA-33	33	47	48	42.5	9
TSBIA-35	35	49	50	42.5	9
TSBIA-38	38	54	56	42.5	9
TSBIA-40	40	56	58	42.5	9
TSBIA-43	43	59	61	46	9.5
TSBIA-45	45	61	63	47.5	9.5
TSBIA-48	48	64	66	47.5	9.5
TSBIA-50	50	66	70	47.5	9.5
TSBIA-53	53	69	73	50.5	9.5
TSBIA-55	55	71	75	50.5	9.5
TSBIA-58	58	78	78	51.5	9.5
TSBIA-60	60	80	80	51.5	9.5
TSBIA-70	70	90	92	56	11