
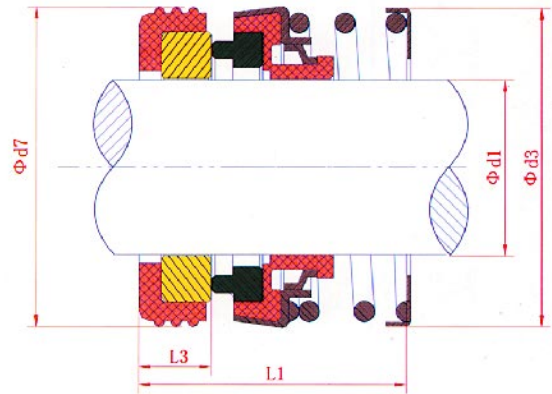


TS 166T

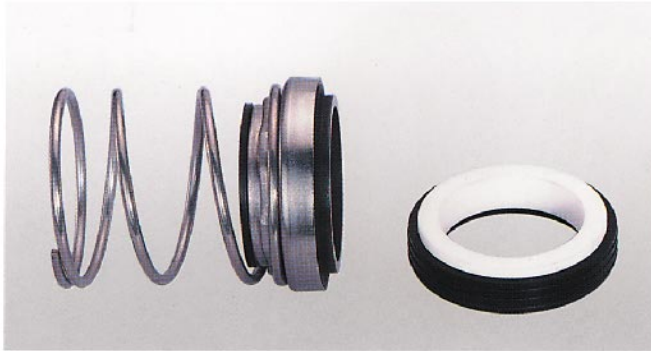

技术参数:
 压力: $\leq 1\text{MPa}$
 线速度: $\leq 10\text{米/秒}$
 温度: $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$

Operating Limits:
 Pressure: $\leq 1\text{MPa}$
 Speed: $\leq 10\text{ m/s}$
 Temperature: $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$

- | | |
|---------------------|------------------------------------|
| ● 弹簧 (不锈钢) | Spring (SUS304/SUS316) |
| ● 紧圈 (不锈钢) | Drive ring (SUS304/SUS316) |
| ● 传动套 (不锈钢) | Retainer (SUS304/SUS316) |
| ● 波纹管 (丁腈胶/三元乙丙/氟胶) | Bellows (NBR/EPDM/VITON) |
| ● 动环 (车制石墨/碳化硅/碳化钨) | Rotary ring (Carbon/SiC/TC) |
| ● 静环 (陶瓷/碳化硅/碳化钨) | Stationary Ring (Ceramic/SiC/TC) |
| ● 静环套 (丁腈胶/三元乙丙/氟胶) | Cup Gasket (NBR/EPDM/VITON) |

Model	d1	d3	d7	L1	L3
TS166T-3/8"	9.525	23.292	24.587	34.138	8.738
TS166T-1/2"	12.700	23.292	27.788	34.138	8.738
TS166T-5/8"	15.875	30.099	30.937	35.712	10.312
TS166T-3/4"	19.050	33.071	33.1/34.138	35.712	6.5/10.312
TS166T-7/8"	22.225	36.297	37.287	35.712	10.312
TS166T-1"	25.400	39.421	41.28/40.488	43.307	10.312
TS166T-11/8"	28.575	44.450	47.625	44.907	11.913
TS166T-11/4"	31.750	47.625	50.800	44.907	11.913
TS166T-13/8"	34.925	50.800	53.975	44.907	11.913
TS166T-11/2"	38.100	53.975	57.150	44.907	11.913
TS166T-15/8"	41.275	60.325	60.325	44.907	11.913
TS166T-13/4"	44.450	60.325	63.500	52.934	11.913
TS166T-17/8"	47.625	63.881	66.675	52.934	11.913
TS166T-2"	50.800	66.675	69.850	54.508	13.487
TS166T-12	12	23.3	27.8	34.1	8.7
TS166T-16	16	30.1	30.95	35.7	10.3
TS166T-20	20	36.3	35.7	35.7	10.3
TS166T-22	22	36.3	37.3	35.7	10.3
TS166T-24	24	39.4	40.5	35.7	10.3
TS166T-25	25	39.4	40.5	35.7	10.3
TS166T-28	28	44.4	47.65	45.2	11.9
TS166T-30	30	47.6	50.8	45.2	11.9
TS166T-32	32	47.6	50.8	45.2	11.9
TS166T-35	35	50.8	54	45.2	11.9
TS166T-38	38	54	57.15	45.2	11.9
TS166T-40	40	60.3	60.35	45.2	11.9
TS166T-45	45	66.7	63.5	52.4	11.9
TS166T-48	48	66.7	66.7	52.4	11.9
TS166T-50	50	66.7	69.85	54	13.5