
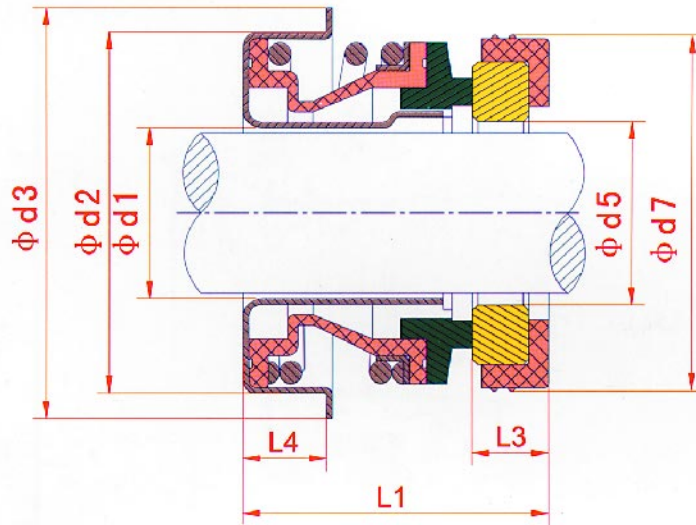


# T S F

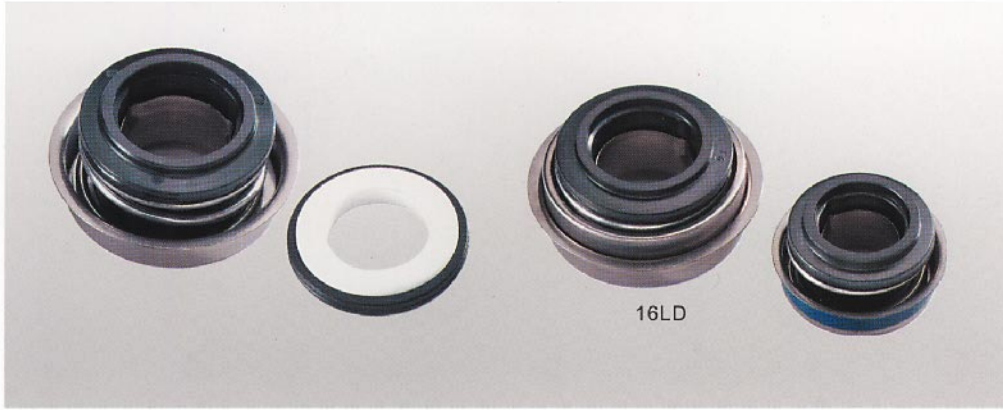

技术参数:  
 压力:  $\leq 0.6\text{MPa}$   
 线速度:  $\leq 15\text{米/秒}$   
 温度:  $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$

Operating Limits  
 Pressure:  $\leq 0.6\text{MPa}$   
 Speed:  $\leq 15\text{ m/s}$   
 Temperature:  $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$

- 动环 (陶瓷/碳化硅/碳化钨) Rotary Ring ( Ceramic/SiC/TC)
- 静环 (热压石墨/车制石墨/碳化硅) Stationary Ring ( Plastic Carbon/Carbon/ SiC)
- 辅助密封 (丁腈胶/三元乙丙胶/ 氢化氟胶) Secondary Seal (NBR/ EPDM/ HNBR)
- 弹簧及冲件 ( 不锈钢 ) Spring & Other Parts (SUS304/SUS316)

Model	Shaft	d1	d2	d3	d5	d7	L1	L3	L4
TSF-10	10	11.0	24	29	12	23	17	4	7
TSF-12S	12	14.2	28.55	32	14	25	18.2	5	8
TSF-12M	12	14.2	30	35	15	24/23	18	5	8
TSF-12L	12	14.2	33.4	38	14	25	18	5	6.7
TSF-16	16	18.2	36.45	41.5	18	31	19.8	5	8.5
TSF-16L	16	18.2	38.1	43.5	18	31	19.8	5	8.8
TSF-16LD	16	18.2	38.1	43.5	18	31	19.8	5	8.8
TSF-20S	20	21.2	38	43.8	21	35	20.5	5	9.5
TSF-20	20	21.2	40	43.8	21	35	20.5	5	9.5
TSF-25S	25	26.4	46	51	26	44	25	7	10
TSF-25	25	26.4	47	51	26	44	25	7	12
TSF-25L	25	26.4	52	57	27	48	25	7	12
TSF-30	30	31.0	52	57	32	48	27	8	11
TSF-1/2 "	12.7	14.2	30	35	13.5	25.4	19.2	6.2	8
TSF-5/8 "	15.875	18.2	36.45	41.5	17.5	31.75	25	10.3	8.5
TSF-3/4 "	19.05	21.2	40	43.8	20	34.925	25.8	10.3	9.5
TSF-1 "	25.4	26.4	47	51	27	41.275	29	11.1	12