
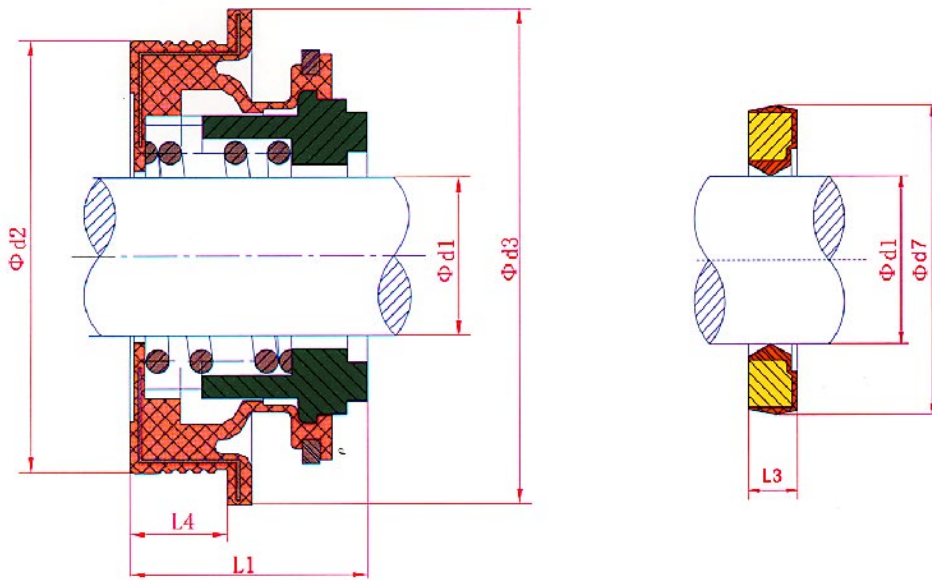


TS FN

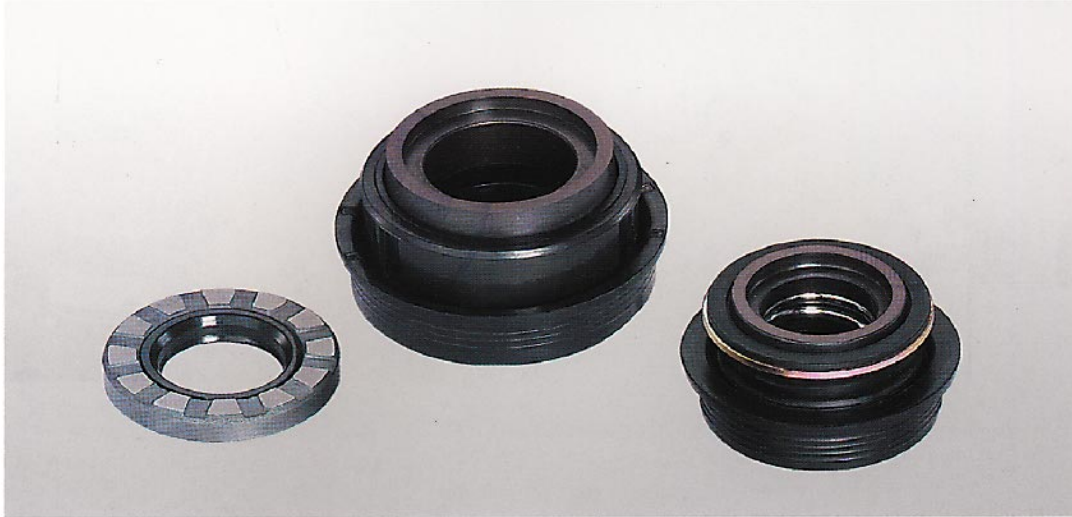

技术参数:

压力: $\leq 0.6\text{MPa}$
 线速度: $\leq 5\text{米/秒}$
 温度: $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$

Operating Limits

Pressure: $\leq 0.6\text{MPa}$
 Speed: $\leq 5\text{m/s}$
 Temperature: $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$

- 波纹管 (丁腈胶/三元乙丙胶/氟胶) Bellows (NBR/EPDM/VITON)
- 弹簧 (锰钢/不锈钢) Spring (65Mn/SUS304/SUS316)
- 压圈 (铁) Drive ring (A3)
- 静环 (热压石墨/车制石墨/碳化硅) Stationary Ring (Plastic Carbon/Carbon/SiC)
- 动环 (陶瓷/碳化硅/碳化钨) Rotary ring (Ceramic/SiC/TC)
- 动环套 (丁腈胶/三元乙丙胶/氟胶) Rotary ring holder (NBR/EPDM/VITON)

Model	d1	d2	d3	d7	L1	L3	L4
TSFN-12M	12	30	34.6		15.5		7.0
TSFN-12L	12	33.4	36.6		15.5		7.0
TSFN-16	16	36.5	42.6	28	16.5	4.5	7.5
TSFN-16L	16	38.1	42.6	28	16.5	4.5	7.5
TSFN-16B	16	36.5	39.7	28.6	16.5	3.5	7
TSFN-20	20	40	42		18.5		11