



Parameter

Temperature: -20℃~180℃

Pressure: ≤ 1.20Mpa

Linear Velocity: ≤ 16m/S

Medium: water, oil, weak acid, weak alkali, ect.


Materials

Rotary Ring: Carbon/SiC/TC

Stationary Ring: Ceramic/SiC/TC/Carbon

Secondary Seals: NBR/EPDM/VITON

Spring & Other Parts: SS304/SS316

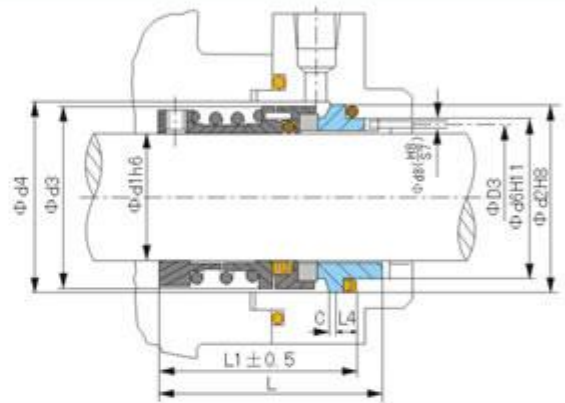

Model	d1	d3	d4	d2	d6	D3	d8	L	L1	L4	c
BS4U-18	18	32	34	33	27	23	3	52	45	5	2
BS4U-20	20	34	36	35	29	25	3	52	45	5	2
BS4U-22	22	36	38	37	31	27	3	53	46	5	2
BS4U-24	24	38	40	39	33	29	3	56	49	5	2
BS4U-25	25	39	41	40	34	30	3	56	49	5	2
BS4U-28	28	42	44	43	37	33	3	56.5	49.5	5	2
BS4U-30	30	44	46	45	39	35	3	57	50	5	2
BS4U-32	32	46	48	48	42	38	3	58.5	51.5	5	2
BS4U-33	33	47	49	48	42	38	3	58.8	51.5	5	2
BS4U-35	35	49	51	50	44	40	3	58.8	51.5	5	2
BS4U-38	38	54	58	56	49	44	4	62	55	6	2
BS4U-40	40	56	60	58	51	46	4	62	55	6	2
BS4U-43	43	59	63	61	54	49	4	65	58	6	2
BS4U-45	45	61	65	63	56	51	4	65	58	6	2
BS4U-48	48	64	68	66	59	54	4	66	59	6	2
BS4U-50	50	66	70	70	62	57	4	67	60	6	2.5
BS4U-53	53	69	73	73	65	60	4	71.5	64.5	6	2.5
BS4U-55	55	71	75	75	67	62	4	73.5	66.5	6	2.5
BS4U-58	58	78	83	78	70	65	4	76.5	69.5	6	2.5
BS4U-60	60	80	85	80	72	67	4	76.5	69.5	6	2.5
BS4U-63	63	83	88	83	75	70	4	78.8	71.5	6	2.5
BS4U-65	65	85	90	85	77	72	4	81.5	74.5	6	2.5
BS4U-68	68	88	93	90	81	75	4	82.5	75.5	7	2.5
BS4U-70	70	90	95	92	83	77	4	86.5	79.5	7	2.5
BS4U-75	75	99	104	97	88	82	4	87	80	7	2.5
BS4U-80	80	104	109	105	95	88	4	90.5	83.5	7	3
BS4U-85	85	109	114	110	100	93	4	90.5	83.5	7	3
BS4U-90	90	114	119	115	105	98	4	92.5	85.5	7	3
BS4U-95	95	119	124	120	110	103	4	93.5	86.5	7	3
BS4U-100	100	124	129	125	115	108	4	93.5	86.5	7	3