


TS 108

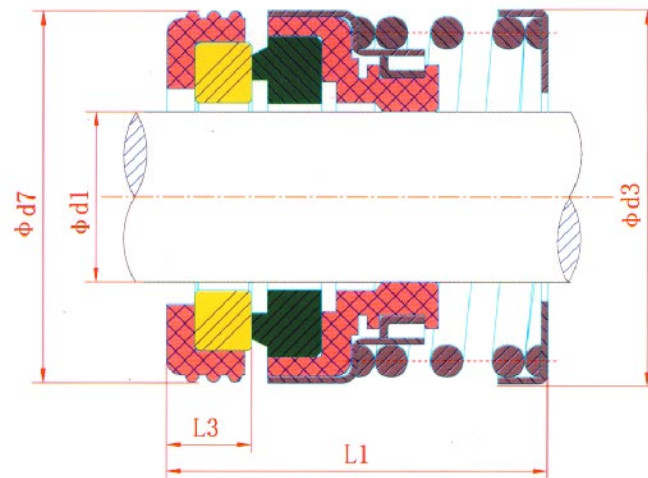

技术参数:

压力: $\leq 1\text{MPa}$

线速度: $\leq 10\text{米/秒}$

温度: $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$

Operating Limits:

Pressure: $\leq 1\text{MPa}$

Speed: $\leq 10\text{m/s}$

Temperature: $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$

- 静环 (陶瓷/碳化硅/碳化钨) Stationary Ring (Ceramic/SiC/TC)
- 动环 (热压石墨/车制石墨/碳化硅/碳化钨) Rotary Ring (Plastic Carbon/Carbon/ SiC/TC)
- 辅助密封 (丁腈胶/三元乙丙胶/氟胶) Secondary Seal (NBR/ EPDM/VITON)
- 弹簧及冲件 (不锈钢) Spring & Other Parts (SUS304/SUS316)

Model	d1	d3	d7	L1	L3	Model	d1	d3	d7	L1	L3
TS108-9	9	20	21	20	4.5	TS108-20	20	34	35	25	7.0
TS108-10	10	20	21	20	4.5	TS108-22	22	36	37	28	7.0
TS108-11	11	22	23	20	4.5	TS108-25	25	39	40	32	7.0
TS108-12	12	22	23	20	4.5	TS108-28	28	42	43	35	7.0
TS108-14	14	24.5	25	25	5.5	TS108-30	30	44	45	35	7.0
TS108-15	15	26.5	27	25	5.5	TS108-35	35	49	50	37	7.0
TS108-16	16	26.5	27	25	5.5	TS108-40	40	56	58	40	8.0
TS108-17	17	32	33	25	7.0	TS108-45	45	61	63	40	8.0
TS108-18	18	32	33	25	7.0	TS108-50	50	67	70	45	8.5
TS108-19	19	34	35	25	7.0	TS108-55	55	72	75	45	8.5