
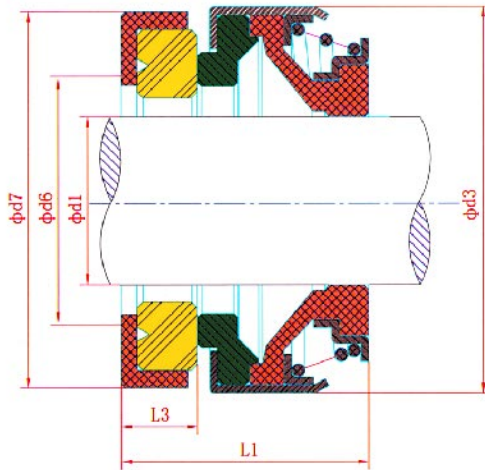


# TS 301

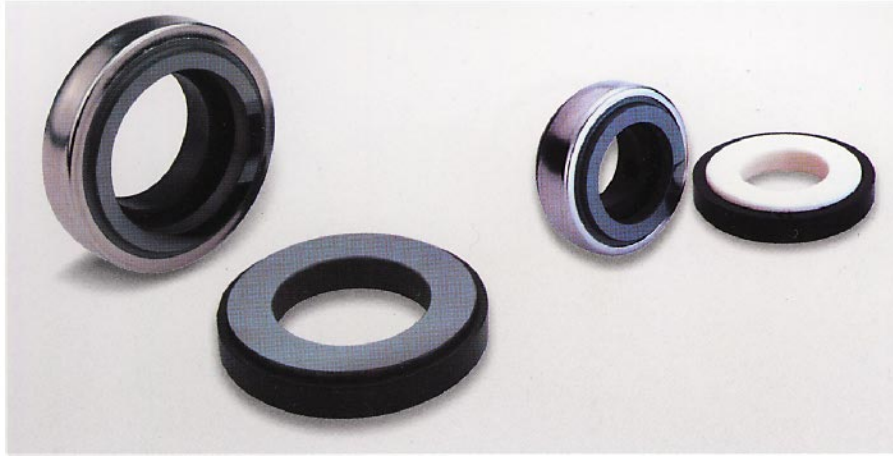

等同于美国“PAC”的TYPE17系列  
Equivalent to "PAC-SEAL" type17

**技术参数:**

压力:  $\leq 0.6\text{MPa}$   
线速度:  $\leq 10\text{米/秒}$   
温度:  $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$

**Operating Limits:**

Pressure:  $\leq 0.6\text{MPa}$   
Speed:  $\leq 10\text{ m/s}$   
Temperature:  $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$

- 静环 (陶瓷/碳化硅/碳化钨) Stationary Ring ( Ceramic/SiC/TC)
- 动环 (热压石墨/车制石墨/碳化硅/碳化钨) Rotary Ring (Plastic Carbon/ Carbon/ SiC/TC)
- 辅助密封 (丁腈胶/三元乙丙胶/氟胶) Secondary Seal (NBR/ EPDM/VITON)
- 弹簧及冲件 (不锈钢) Spring & Other Parts ( SUS304/SUS316)

Model	d1	d3	d6	d7	L1	L3	Model	d1	d3	d6	d7	L1	L3
TS301-6	6	18	8	18	14	4	TS301-19	19	39	21	42	21	8
TS301-8S	8	18	10	22	15	4	TS301-20	20	39	22	42	21	8
TS301-8M	8	20	10	22/26	15	4/5.5	TS301-20L	20	42	24	45	23	10
TS301-8L	8	24	10	26	15	5.5	TS301-22S	22	36	24	45	26.5	10
TS301-10	10	24	12	26	21	8	TS301-22L	22	42	24	45	23	10
TS301-11	11	24	13	26	21	8	TS301-23	23	47	25	50	23.5	10
TS301-12	12	24	14	25/26	21	8	TS301-24	24	47	26	50	23.5	10
TS301-13	13	24	15	26	19.5	5.5/8	TS301-25	25	42	27	50	23.5	10
TS301-13L	13	28	16	28	21	8	TS301-25L	25	47	27	50	23.5	10
TS301-13H	13	32	16	29.5	30.5	8	TS301-26	26	47	29	50	23.5	10
TS301-14	14	28	16	28/28.5	21	8	TS301-27	27	47	30	50	23.5	10
TS301-14L	14	32	16	29.5	21	8	TS301-28	28	54	31	57	25	10
TS301-15S	15	28	16	28.5/30	21	8	TS301-30	30	54	33	57	25	10
TS301-15M	15	32	16	30/29.5	21	8	TS301-32	32	54	35	57	25	10
TS301-15L	15	39	18	38	21	8	TS301-35	35	60	38	63	26	10
TS301-16S	16	28	16	29.5/30	21	8	TS301-38	38	65	41	68	30	12
TS301-16M	16	32	18	29.5	21	8	TS301-40	40	65	43	68	30	12
TS301-16L	16	39	18	38	21	8	TS301-45	45	70	48	73	32	12
TS301-16H	16	32	16	30	31	10	TS301-50	50	85	52	88	38	15
TS301-17	17	39	19	42	21	8	TS301-55	55	85	58	88	38	15
TS301-18	18	39	20	42	21	8	TS301-60	60	105	63	110	45	15