

TSCG




技术参数:

压力: $\leq 1.2\text{MPa}$
 线速度: $\leq 10\text{米/秒}$
 温度: $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$

Operating Limits:

Pressure: $\leq 1.2\text{MPa}$
 Speed: $\leq 10\text{m/s}$
 Temperature: $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$

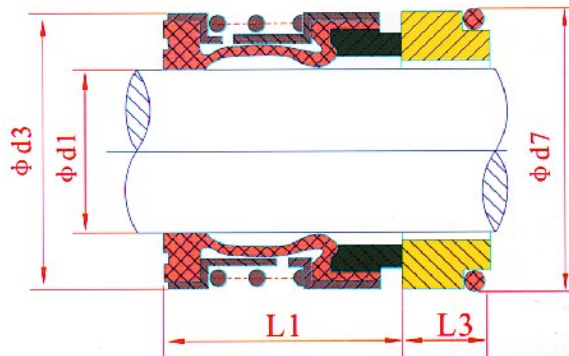

- 静环 (陶瓷/碳化硅/碳化钨) ● Stationary Ring (Ceramic/SiC/TC)
- 动环 (车制石墨/碳化硅/碳化钨) ● Rotary Ring (Carbon/ SiC/TC)
- 辅助密封 (丁腈胶/三元乙丙胶/氟胶) ● Secondary Seal (NBR/ EPDM/VITON)
- 弹簧及冲件 (不锈钢) ● Spring & Other Parts (SUS304/SUS316)

Equivalent to John crane type 2100 with "BO" seat or "G60" seat also can be provided
 等同于克兰Type 2100 配“BO”型静环, 还可提供G60型静环

Model	d1	d3	d7	L1	L3
TSCG-16	16	26	27	15	12
TSCG-18	18	32	33	20	13.5
TSCG-20	20	34	35	20	13.5
TSCG-22	22	36	37	20	13.5
TSCG-24	24	38	39	20	13.3
TSCG-25	25	39	40	20	13
TSCG-28	28	42	43	26	12.5
TSCG-30	30	44	45	26	12
TSCG-32	32	46	48	26	12
TSCG-33	33	47	48	26	12
TSCG-35	35	49	50	26	12
TSCG-38	38	54	56	30	13
TSCG-40	40	56	58	30	13
TSCG-43	43	59	61	30	13
TSCG-45	45	61	63	30	13
TSCG-48	48	64	66	30	13
TSCG-50	50	66	70	30	13.5
TSCG-53	53	69	73	30	13.5
TSCG-55	55	71	75	30	13.5
TSCG-60	60	80	80	33	13.5
TSCG-65	65	85	85	33	13.5
TSCG-70	70	90	92	33	14.5
TSCG-75	75	99	97	40	14.5