


TS 502

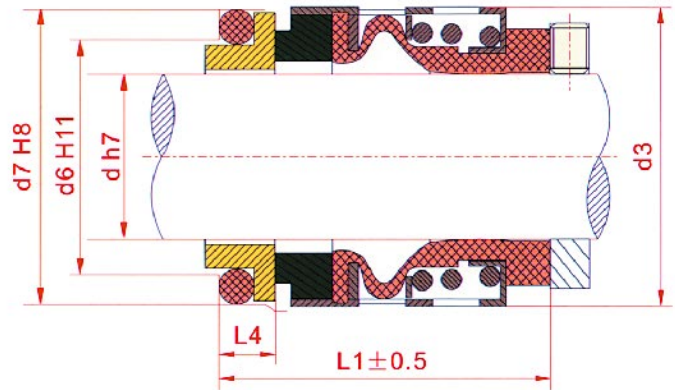

技术参数:

压力: $\leq 4\text{MPa}$

线速度: $\leq 13\text{m/s}$

温度: $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$

Operating Limits:

Pressure: $\leq 4\text{MPa}$

Speed: $\leq 13\text{m/s}$

Temperature: $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$

● 静环(陶瓷/碳化硅/碳化钨)

Stationary Ring (Ceramic/SiC/TC)

● 动环(车制石墨/碳化硅/碳化钨)

Rotary Ring (Carbon/SiC/TC)

● 辅助密封(氟胶/包氟)

Secondary Seal (VITON/PTFE+VITON)

● 弹簧及其它金属件(不锈钢)

Spring & Other Parts (SUS304/SUS316)

TS502系列标准配BO静环(DIN24960),另外 还可提供BP、BC静环

TS 502 seal equip with BO seat (DIN24960), Other seats can also be provided, such as BP, BC

Seal size d(mm)	d3	d6	d7	L1	L4
14	24	21	25	35	12
16	26	23	27	35	12
18	32	27	33	37.5	13.5
20	34	29	35	37.5	13.5
22	36	31	37	37.5	13.5
24	38	33	39	40	13.3
25	39	34	40	40	13
28	42	37	43	42.5	12.5
30	44	39	45	42.5	12
32	46	42	48	42.5	12
35	49	44	50	42.5	12
38	54	49	56	45	13
40	56	51	58	45	13
45	61	56	63	45	13
50	66	62	70	47.5	13.5
55	71	67	75	47.5	13.5
60	80	72	80	52.5	13.5
70	89	83	92	60	14.5
80	104	95	105	60	15