


# TS 103

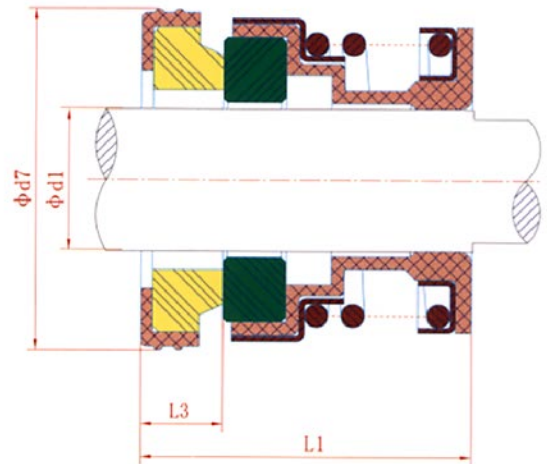


**技术参数:**                      **Operating Limits:**  
 压力:  $\leq 0.8\text{MPa}$               Pressure:  $\leq 0.8\text{MPa}$   
 线速度:  $\leq 5\text{米/秒}$               Speed:  $\leq 5\text{m/s}$   
 温度:  $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$       Temperature:  $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$

- 静环(热压石墨)                      Stationary Ring (Plastic Carbon)
- 动环(陶瓷)                              Rotary Ring (Ceramic)
- 辅助密封(丁腈胶/氟胶)              Secondary Ring (NBR/VITON)
- 弹簧及传动套(不锈钢/铜)              Spring and Retainer( S.S/Copper)

Model	d1	d7	L1	L3
TS103-10	10	25	20.5	4.5
TS103-12	12	26	20.5	5.5
TS103-12L	12	26	20.5	7.5
TS103-14	14	30	20.5	7
TS103-17	17	35	20.5	7
TS103-18	18	35	20.5	7

# TS 104

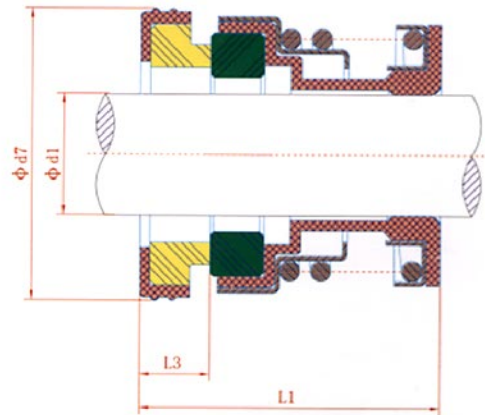

**技术参数:**                      **Operating Limits:**  
 压力:  $\leq 0.8\text{MPa}$                       Pressure:  $\leq 0.8\text{MPa}$   
 线速度:  $\leq 5\text{米/秒}$                       Speed:  $\leq 5\text{m/s}$   
 温度:  $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$               Temperature:  $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$

- 静环(热压石墨)                      Stationary Ring (Plastic Carbon)
- 动环(陶瓷)                              Rotary Ring (Ceramic)
- 辅助密封(丁腈胶/氟胶)              Secondary Ring (NBR/VITON)
- 弹簧及传动套(不锈钢/铜)              Spring and Retainer( S.S/Copper)

Model	d1	d7	L1	L3
TS104-9	9	22	20	5.5
TS104-10	10	22	20	5.5
TS104-11	11	24	20	5.5
TS104-12	12	24	20	5.5
TS104-14	14	26	25	7
TS104-15	15	28	25	7
TS104-16	16	28	25	7
TS104-17	17	34	25	7
TS104-18	18	34	25	7
TS104-19	19	36	25	7
TS104-20	20	36	25	7
TS104-22	22	38	25	7
TS104-25	25	41	37	9
TS104-30	30	46	37	9
TS104-35	35	51	37	9
TS104-40	40	60	40	10.5
TS104-45	45	65	40	10.5