


TS 580B

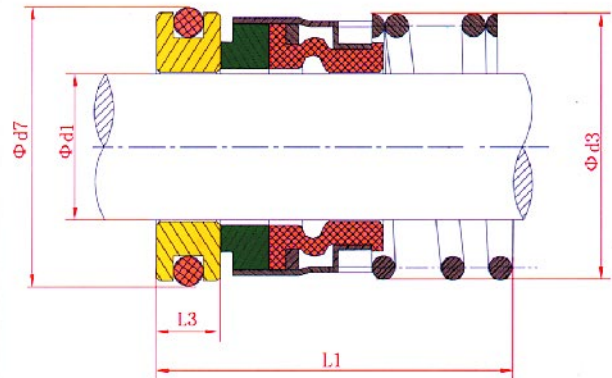

技术参数:

压力: $\leq 2.8\text{MPa}$

线速度: $\leq 13\text{米/秒}$

温度: $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$

Operating Limits:

Pressure: $\leq 2.8\text{MPa}$

Speed: $\leq 13\text{ m/s}$

Temperature: $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$

- 静环 (陶瓷/碳化硅/碳化钨/不锈钢) Stationary Ring (Ceramic/SiC/TC/SUS304)
- 动环 (车制石墨/碳化硅/碳化钨) Rotary Ring (Carbon/ SiC/TC)
- 辅助密封 (丁腈胶/三元乙丙胶/氟胶) Secondary Seal (NBR/ EPDM/VITON)
- 弹簧及冲件 (不锈钢) Spring & Other Parts (SUS304/SUS316)

Equivalent to John crane type 1 with " W " seat or " WM " seat also can be provided
 等同于克兰Type 1配“W”型静环, 还可提供WM型静环

Model	d1	d3	d7	L1	L3
TS580B-14	14.0	29.0	25.0	52.0	8.0
TS580B-16	16.0	29.0	27.0	52.0	8.0
TS580B-18	18.0	32.0	33.0	52.0	8.0
TS580B-19	19.0	32.0	35.0	52.0	8.0
TS580B-20	20.0	33.0	37.0	52.0	8.0
TS580B-24	24.0	38.0	39.0	52.0	8.0
TS580B-25	25.0	38.0	40.0	52.0	8.0
TS580B-28	28.0	46.0	43.0	69.0	9.0
TS580B-30	30.0	49.0	45.0	69.0	9.0
TS580B-32	32.0	49.0	48.0	69.0	9.0
TS580B-35	35.0	52.0	50.0	70.0	10.0
TS580B-38	38.0	56.0	56.0	70.0	10.0
TS580B-40	40.0	59.0	58.0	70.0	10.0
TS580B-45	45.0	62.0	63.0	81.0	10.0
TS580B-48	48.0	65.0	66.0	81.0	10.0
TS580B-50	50.0	68.0	70.0	81.0	10.0
TS580B-55	55.0	75.0	75.0	83.0	12.0
TS580B-60	60.0	78.0	80.0	83.0	12.0
TS580B-65	65.0	86.0	85.0	83.0	12.0