


# TS 208

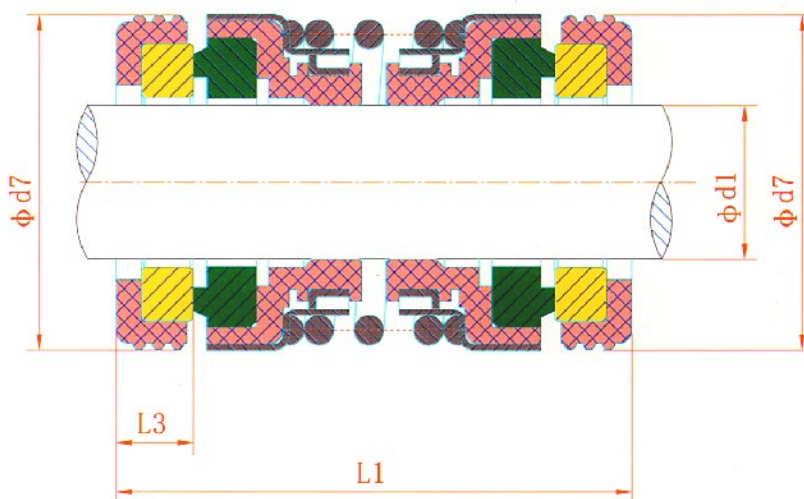

## 技术参数:

压力:  $\leq 1.2\text{MPa}$

线速度:  $\leq 10\text{米/秒}$

温度:  $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$

## Operating Limits:

Pressure:  $\leq 1.2\text{MPa}$

Speed:  $\leq 10\text{m/s}$

Temperature:  $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$

● 静环(陶瓷/碳化硅/碳化钨)

Stationary Ring (Ceramic/SiC/TC)

● 动环(热压石墨/车制石墨/碳化硅/碳化钨)

Rotary Ring (Plastic Carbon/Carbon/ SiC/TC)

● 辅助密封(丁腈胶/三元乙丙胶/氟胶)

Secondary Ring (NBR/EPDM/VITON)

● 弹簧及传动套(不锈钢)

Spring and Retainer(SUS304/SUS316)

Model	d1	d7	L1	L3
TS208-10	10	21	30	5.5
TS208-12	12	23	30	5.5
TS208-14	14	26/28	38	6.5
TS208-16	16	28/30	38	6.5
TS208-18	18	33/35	38	8.0
TS208-20	20	35/36	40	8.0
TS208-25	25	40/41	48	8.0
TS208-30	30	45	51	8.0
TS208-35	35	50	51	8.0
TS208-40	40	58	58	9.0
TS208-45	45	63	58	9.0