


TS FB

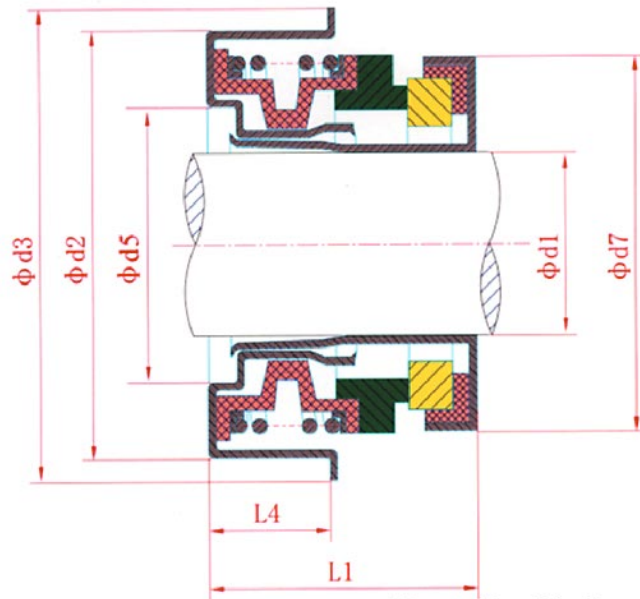

技术参数:
 压力: $\leq 0.6\text{MPa}$
 线速度: $\leq 15\text{米/秒}$
 温度: $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$

Operating Limits
 Pressure: $\leq 0.6\text{MPa}$
 Speed: $\leq 15\text{m/s}$
 Temperature: $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$

- 动环 (陶瓷/碳化硅/碳化钨) Rotary ring (Ceramic/SiC/TC)
- 静环 (热压石墨/车制石墨/碳化硅) Stationary Ring (Plastic Carbon/Carbon/SiC)
- 辅助密封 (丁腈胶/三元乙丙胶/氟化氟胶) Secondary Seal (NBR/EPDM/HNBR)
- 弹簧及冲件 (不锈钢) Spring & Other Parts (SUS304/SUS316)

Model	d1	d2	d3	d5	d7	L1	L4
TSFB-12S	12	28.55	32.0	18.5	25/26	17.5	8
TSFB-12M	12	30.00	35.0	18.5	25/26	17.5	8
TSFB-12L	12	33.4	38	18.5	25/26	17.5	6.7
TSFB-13	13	30	35	18.5	25/26	18	8
TSFB-15	15	36.45	41.5	22.5	30.5	20.5	8.5
TSFB-16	16	36.45	41.5	22.5	30.5	20.5	8.5
TSFB-16B	16	36.45	41.5	22.5	28	20	8.5
TSFB-16T	16	36.45	41.5	19.3	31.5	20.5	9
TSFB-16L	16	38.10	43.5	22.5	30.5	20.5	8.8
TSFB-16LD	16	38.1	43.5	22.5	28.5	20.5	8.8
TSFB-20	20	38/40	43.8	26.5	37	22	9.5
TSFB-20T	20	40	43.8	28	37	22	9.5