
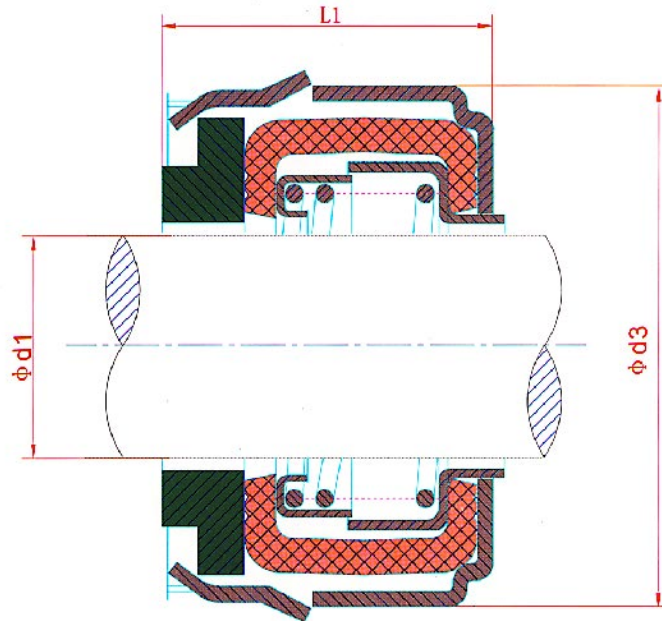


TST

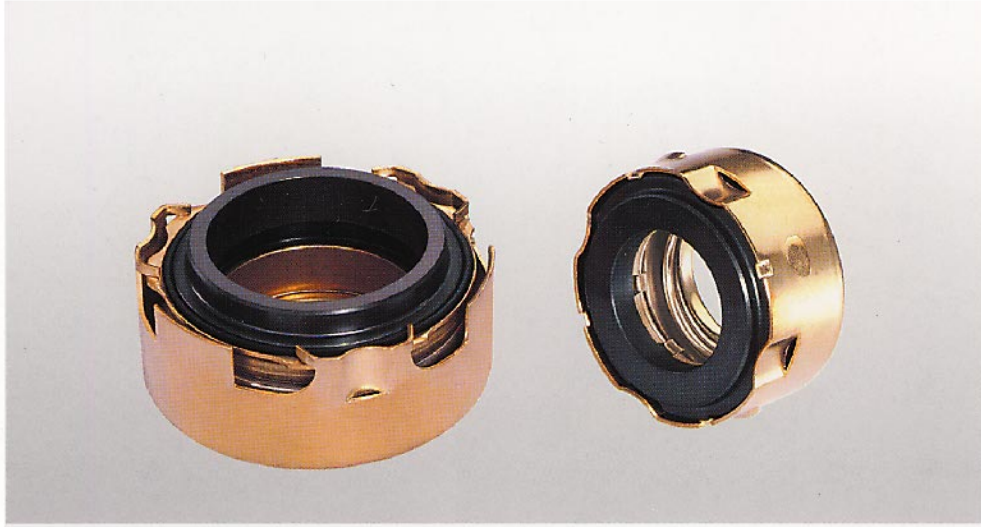

技术参数:
 压力: $\leq 0.6\text{MPa}$
 线速度: $\leq 10\text{米/秒}$
 温度: $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$

Operating Limits
 Pressure: $\leq 0.6\text{MPa}$
 Speed: $\leq 10\text{m/s}$
 Temperature: $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$

- 静环 (热压石墨/车制石墨/碳化硅) Stationary Ring (Plastic Carbon/Carbon/SiC)
- 辅助密封 (丁腈胶/三元乙丙胶/氢化氟胶) Secondary Seal (NBR/EPDM/HNBR)
- 弹簧 (锰钢/不锈钢) Spring (65Mn/SUS304)
- 冲件 (铜/不锈钢/A3铁) Other Parts (Copper/SUS304/A3)

Model	d1	d3	L1
TST-08	16	36.5	16.5
TST-08S	16	33.4	14.5
TST-04	20	43	18
TST-02S	25	51	25.5
TST-02M	25	52	23
TST-02L	25	52.5/52	29