




**Parameter**

Temperature: -20 °C ~200 °C  
 Pressure:  $\leq 0.8\text{Mpa}$  Linear Velocity:  $\leq 15\text{m/S}$   
 Medium: water, oil, weak acid,  
 weak alkali, ect.

**Materials**

Rotary Ring: Carbon/SiC/TC/SS  
 Stationary Ring: Carbon/SiC/TC  
 Secondary Seals: NBR/EPDM/VITON  
 Spring and Metal Parts: SS304/SS316

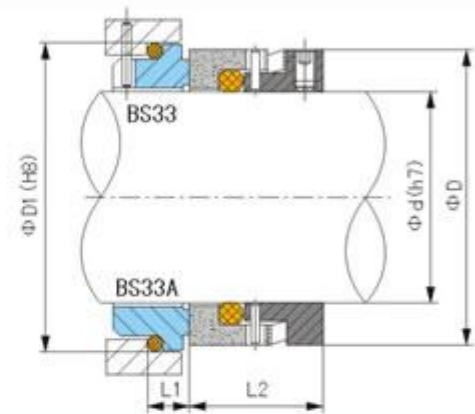

Model	d	D	D1	L1	L2
BS33-16	16	27	27	8.6	19.3
BS33-20	20	31	35	10	19.3
BS33-22	22	33	37	10	19.3
BS33-24	24	34.1	39	10	19.3
BS33-25	25	35.2	40	10	19.3
BS33-28	28	40	43	10	19.3
BS33-30	30	41	45	10	19.3
BS33-32	32	42.4	48	10	19.3
BS33-33	33	44	48	10	19.3
BS33-35	35	45.5	50	10	21.3
BS33-38	38	51.8	56	11	21.3
BS33-40	40	53.8	58	11	21.3
BS33-43	43	56	61	11	21.3
BS33-45	45	58.2	63	11	21.3
BS33-48	48	61.4	66	11	21.3
BS33-50	50	61.9	70	13	21.3
BS33-55	55	72	75	13	22.3
BS33-60	60	76	80	13	26
BS33-63	63	79.3	83	13	26
BS33-65	65	82.3	85	13	26
BS33-70	70	88.9	92	15.3	26
BS33-75	75	96	97	15.3	26

Model	d	D	D1	L1	L2
BS33A-5/8"	15.8	27	28.58	6.3	19.3
BS33A-16	16	27	28.58	6.3	19.3
BS33A-3/4"	19.05	30.3	31.75	6.3	19.3
BS33A-24	24	34.2	35.46	7.6	19.3
BS33A-28	28	40	42	7.6	19.3
BS33A-1 1/8"	28.58	40	41.27	7.6	19.3
BS33A-30	30	40.7	42.7	7.6	19.3
BS33A-1 1/4"	31.75	42.5	44.2	7.6	19.3
BS33A-32	32	42.5	44.45	7.6	19.3
BS33A-35	35	45.6	47.62	7.6	19.3
BS33A-38	38	52	53.97	8.1	21.3
BS33A-1 3/4"	44.45	58.3	60.32	8.1	21.3
BS33A-1 7/8"	47.63	61.5	63.5	8.1	21.3
BS33A-50	50	62	63.96	8.1	21.3